


Wiring ducts

Flexible thermoplastic wiring duct

Technical details


- Color: **RAL 7040 grey**
- Plastic, insulating, shock-proof, self-extinguishing material in compliance with UL 94 V2 Standard and resistant to permanent temperature of 80 °C and peaks up to 110 °C in
- Resistant to acids, oils, and greases
- Ribs alternate and angle slightly inwards to make it easier to insert and extract cables
- No covers so that cables can be constantly monitored
- Possibility of fastening using screws and rivets or bi-adhesive tape which sticks strongly to the steel (pre-mounted)
- Suitable for connecting panels and doors with compass opening mechanisms and in general for applications where cabling is subject to bending and twisting
- **Standard 500-mm length**
- Industrial applications

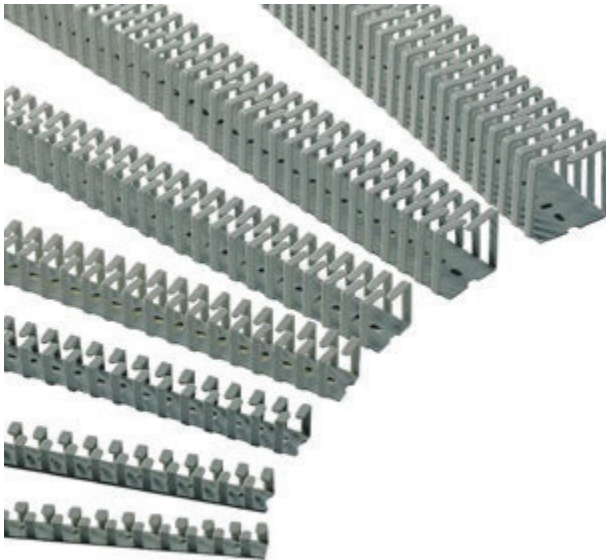

Wiring ducts

Flexible thermoplastic wiring duct

Flexible wiring duct – Slot pitch 7,5/5. Standard length 500 mm.

	Product ID	Order code	Dimensions WxH (mm)	Weight (kg/pcs)	Unit/pack-pcs
 1SLC80024F0001	05400	M054000000	12,5x12,5	0,011	112
	05402	M054020000	16x16	0,014	84
	05405	M054050000	20x20	0,024	112
	05410	M054100000	25x25	0,033	70
	05415	M054150000	30x30	0,044	50
	05420	M054200000	40x40	0,066	50
	05425	M054250000	50x50	0,100	32